

Fieldpiece®

2026 CATALOG





About Us

Since 1990, Fieldpiece has been building tools and solutions for HVACR pros who champion comfort and efficiency every day. From new installs and commissioning to service and repair, our tools are designed to make a technician's job easier, faster, and better.

We obsess over the features that simplify diagnostics, reduce callbacks, and help techs move on to the next job with confidence. We develop innovations like the Job Link® System of wireless tools and app that delivers a complete system snapshot in your hand, along with clean, professional reports customers understand and trust.

As refrigerants and regulations continue to evolve, Fieldpiece leads the way with a lineup of A2L- and A3-compatible tools so you're ready for what's next.

Fieldpiece. TOOLS HVACR TOOLS PROS TRUST.

Contents

Job Link® System	02
Refrigerant Tools	06
Recovery & Evacuation	14
Leak Detection	22
Hoses, Fittings & VCRTs	26
Electrical	32
Air Tools	40
Heating	50
Accessories	58
Fieldpiece University	64
Rewards Program	66
Index	68



Job Link

Link Your Tools. Link Your Jobs.

The Job Link® System of Fieldpiece wireless tools and mobile app gathers real-time system measurements across a jobsite and puts them in the palm of your hand. From connected pipe clamps and probes to electrical meters and scales, you have a full system snapshot to commission and service HVACR systems easier, faster, and better.

Live Measurements

View live measurements and advanced calculations from multiple tools at once and see dynamic data changes with any system adjustments you make.

Reduce Call Backs

Make an impact on every call by completing inspection checklists*, using helpful diagnostics to identify and fix problems the first time, and delivering in-depth, customized reports* to your customer. Need help? Share what you're seeing with another tech via Live Look-in*.

Learn More about all the features of the Job Link® System at fieldpiece.com.

Fit for your Business

Select from three subscription tiers, depending on your HVACR business needs.

Job Link® Free

- Live measurements
- Advanced calculations
- System diagnostics
- PDF reports

Job Link® Pro

Everything in Job Link® Free plus:

- Cloud storage
- Inspection checklists
- Photos and notes
- Customer and equipment history
- Build teams
- Live Look-in

Job Link® Pro + Invoicing

Everything in Job Link® Free and Job Link® Pro plus:

- Professional invoicing
- Customizable parts and equipment
- Customizable hourly rates
- QuickBooks online integration


Get Started



*Job Link® Pro/Pro+ Subscription

Job Link System Tools

The Job Link® System features one-time connectivity of your Fieldpiece wireless tools in the Job Link app, with the most advanced wireless range of up to 1,000 ft (300 m).

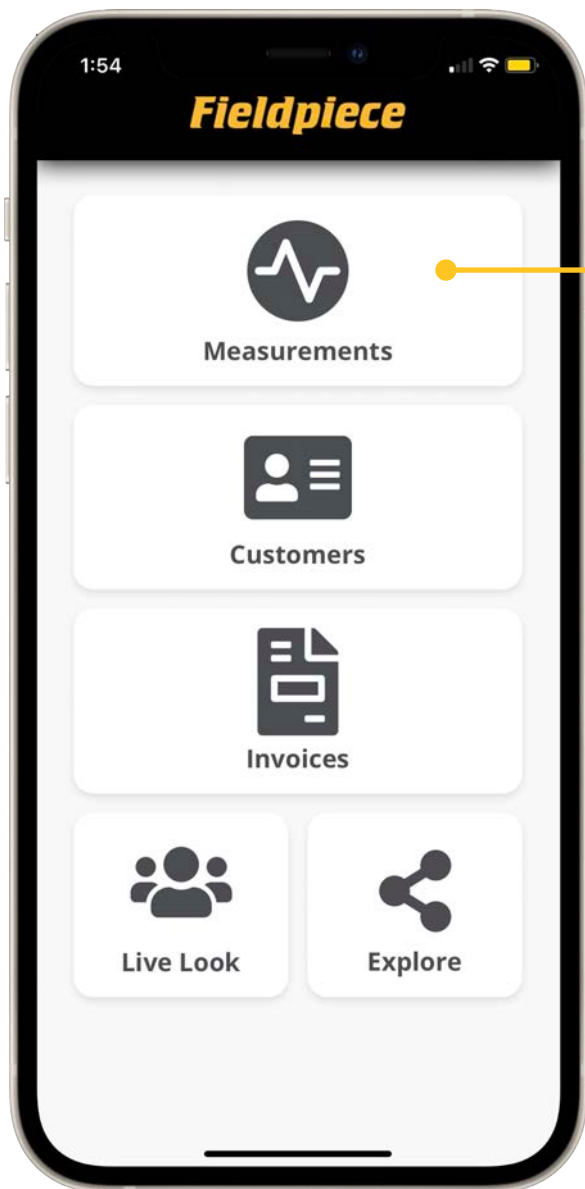

Look for the Job Link logo throughout the catalog:



Digital Manifolds
SM482V | SM382V p 08



Pipe Clamps
JL3LC | JL3PC p 12



Pressure Probe
JL3PR p 12



Clamp Meters
SC480 | SC680 p 34, 36



Psychrometer
JL3RH p 44



Manometer
JL3MN | JL3KM2 p 42



Refrigerant Scale
SR47 p 16



Vacuum Gauge
MG44 p 19



Leak Detector
DRX3 p 24



Combustion Analyzers
CAT45 | CAT85 p 52

REFRIGERANT TOOLS



SM482V | SM382V

Wireless SMAN® Refrigerant Manifold

- Available in 4-Port (SM482V) or 3-Port (SM382V)
- Wireless range of 1,000 ft (300 m)
- Rugged construction
- Temperature compensated system tightness test
- Job Link® System enabled
- Data logging
- Water resistant (IP55)



SM482V (4-PORT)



SM382V (3-PORT)

GS422F | GS434F | GS322F | GS334F

Analog Gauge Set

- Rugged construction
- Rotating pressure marker
- Piston valves for precise flow control
- High visibility sight glass
- Swappable hose seats (5/16" optional)
- Robust, folding hook

Part #	No. Ports	Refrigerants
GS322F	3-Port	Common A1 & A2L Refrigerants
GS422F	4-Port	R22, R32, R410A, R454B
GS334F	3-Port	Refrigeration
GS434F	4-Port	R134a, R404A, R407C, R448A



GS422F (4-PORT: Common + A2L)
GS434F (4-PORT: Refrigeration)



GS322F (3-PORT: Common + A2L)
GS334F (3-PORT: Refrigeration)



JL3KH6

Job Link® System Charge and Air Kit

- Wireless range of 1,000 ft (300 m)
- Directly connects to mobile device with Job Link® System App
- Fast accurate temps with patented Rapid Rail® technology
- Pressure probe auto calibrates at any elevation
- Configurable psychrometers with flexible probe and sliding magnet



JobLink 

JL3KR4

Job Link® System Charge Kit

- Wireless range of 1,000 ft (300 m)
- Directly connects to mobile device with Job Link® System App
- Fast accurate temps with patented Rapid Rail® technology
- Pressure probe auto calibrates at any elevation
- Ideal for critically charged systems
- Water resistant (IP54)



JobLink 

JL3PR

Job Link® System Pressure Probe

- Wireless range of 1,000 ft (300 m)
- 45° angled fitting easily connects in tight spaces
- Pressure sensors are accurate at any elevation
- Ideal for critically charged systems
- Water resistant (IP54)



JobLink  A2L

JL3PC

Job Link® System Premium Pipe Clamp Probe

- Jaw range between 1/4 – 1 3/8 in (6 – 35 mm)
- Powerful 1,000 ft (300 m) wireless range
- Stabilizes in 3 seconds with $\pm 1^\circ\text{F}$ ($\pm 0.6^\circ\text{C}$) accuracy
- Patented Rapid Rail® Sensor
- Water resistant (IP54)



JobLink 

JL3LC

Job Link® System Large Pipe Clamp

- Jaw range between 3/4 – 4 1/8 in (19 – 105 mm)
- Works wirelessly up to 1,000 ft (300 m)
- Extremely accurate and quick
- Patented Rapid Rail® Sensor
- Water resistant (IP65)



JobLink 



RECOVERY & EVACUATION



MR45

Digital Recovery Machine

- DC Motor: 1 HP (variable smart speed)
- Starts and runs easily with lower voltage
- Minimizes liquid slugging and maximizes vapor recovery
- 3 selectable auto stop levels
- Easy access ports



SR47

Wireless Refrigerant Scale

- 13 in (330mm) platform fits larger tanks
- Max load 252 lbs (114 kg)
- 200 hour platform battery life
- Wireless range of 1,000 ft (300 m)
- Connect to Job Link® System Mobile App
- Integrated bumpers for increased durability
- Water resistant (IP54 platform, IP64 remote)



SRS1

Refrigerant Scale

- Charging & recovery weight alarms
- Easy to carry
- 0.25 oz (0.01 kg) resolution
- Maximum load: 110 lbs (50 kg)
- Accuracy: $\pm (0.05\% \text{ rdg} + 10 \text{ g})$
- Water resistant





VP833 | VPX7 | VP87 | VP67

Vacuum Pumps

All Fieldpiece Vacuum Pumps feature:

- RunQuick® Oil Change System for on-the-fly oil changes in seconds
- Port Sizes: (1) 1/4", (2) 3/8", (1) 1/2"
- Small footprint – 1,346 in³ (22,057 cm³)
- No-tip stable base

Part #	LPM (CFM)	DC Motor	Weight	Compatible
VP833	227 (8)	3/4 HP	29 lbs (13.2 kg)	A3, A2L
VPX7	283 (10)	3/4 HP	24 lbs (10.9 kg)	A2L
VP87	227 (8)	3/4 HP	27 lbs (12.2 kg)	A2L
VP67	170 (6)	1/2 HP	29 lbs (13.2 kg)	A2L

✓A3|A2L

MG44

Wireless Vacuum Gauge

- Reversible angled coupler and cylindrical design fits into tight spaces
- There are three ways to use:
 - 1) Backlit display
 - 2) Job Link® mobile app
 - 3) SMAN® Refrigerant Manifold
- Shows rate, bar graph, and rate meter
- Water resistant (IP54)



JobLink ✓A2L



OIL8X3

3 Pack Vacuum Pump Oil

- Three eight-ounce containers of vacuum pump oil
- Low vapor pressure ideal for pulling vacuums
- Wide temperature range helps oil perform in any conditions
- Highly refined for consistent performance
- Ensures proper sealing and lubrication
- Designed to work with our RunQuick® Oil Change System



OIL128 | OIL32

Vacuum Pump Oil

- Gallon-size (OIL128) or Quart (OIL32) size container of vacuum pump oil
- Low vapor pressure ideal for pulling vacuums
- Wide temperature range helps oil perform in any conditions
- Highly refined for consistent performance
- Ensures proper sealing and lubrication
- Designed to work with our RunQuick® Oil Change System



LEAK DETECTION



DRX3

Refrigerant & Combustible Gas Leak Detector

- One sensor detects HC, HFC, CFC, HCFC, HFO, H2/N2 (Tracer Gas), blend refrigerants, and natural gas, propane, butane, methane heating fuels
- Field-replaceable heated diode sensor
- 60-hour life replaceable batteries
- Sensitivity to 0.03 oz/yr (1g/yr)
- Large backlit easy-to-read LCD display
- Leak intensity feedback: flashing LED, beeps, LCD display, and Job Link® System app



JobLink  A3|A2L

DR82

Infrared Refrigerant Leak Detector

- Detects all HFC, CFC, HCFC, HFO and blends
- State-of-the-art infrared sensor with 10-year life
- Doesn't trigger on soap bubbles and oil
- 10-hour USB rechargeable lithium-ion battery
- Sensitivity to 0.03 oz/yr (1g/yr)
- Large backlit easy-to-read LCD display
- Leak intensity feedback: Flashing LED, beeps, and LCD display



 A2L

DR58

Heated Diode Refrigerant Leak Detector

- Detects all HFC, CFC, HCFC, HFO, H2/N2 (Tracer Gas) and blends
- Field-replaceable heated diode sensor
- 18-hour USB rechargeable lithium-ion battery
- Sensitivity to 0.03 oz/yr (1g/yr)
- Large backlit easy-to-read LCD display
- Leak intensity feedback: Flashing LED, beeps, and LCD display



 A2L



HOSES FITTINGS & VCRTS



HR3B | HR1B | HR3BM | HR1BM

Ball Valve Charging Hoses (5 ft / 1.5 m)

- Rugged Full-Ring Triple Crimp
- Hose Color Tags
- 4-Layer Construction

Part #	Fitting Size	Quantity
HR3B	1/4"	3
HR1B	1/4"	1
HR3BM	5/16"	3
HR1BM	5/16"	1

* 5/16" set includes (2) 5/16" ball valve hoses
& (1) 1/4" ball valve hose



HV1 | HV1S

Vacuum Hoses (5 ft / 1.5 m)

- Rugged Full-Ring Triple Crimp
- 3/8" I.D. for Rapid Evacuation
- 4-Layer Construction
- HV1: 3/8" x 3/8" Fittings
- HV1S: 3/8" x 1/4" Fittings

Part #	Fitting Size	Quantity
HV1	3/8" x 3/8"	1
HV1S	3/8" x 1/4"	1



HR3L | HR1L | HR3CM | HR1LM

Low Loss Valve Charging Hoses (5 ft / 1.5 m)

- Rugged Full-Ring Triple Crimp
- Hose Color Tags
- 4-Layer Construction

Part #	Fitting Size	Quantity
HR3L	1/4"	3
HR1L	1/4"	1
HR3CM	5/16"	3
HR1LM	5/16"	1

* 5/16" set includes (2) 5/16" low loss hoses
& (1) 1/4" ball valve hose



HR3XB | HR3X

Hose Extensions

- Rugged Full-Ring Triple Crimp
- Color Tags Included
- 4-Layer Construction



Part #	Fitting Size	Quantity
HR3XB	1/4" Ball Valve	3
HR3X	1/4" Open Valve	3



HR3 | HR1

Open Fitting Charging Hoses (5 ft / 1.5 m)

- Rugged Full-Ring Triple Crimp
- Hose Color Tags
- 4-Layer Construction

Part #	Fitting Size	Quantity
HR3	1/4"	3
HR1	1/4"	1



HR1XR

A2L Adapter Hose Extension

- Left-handed reverse thread
- Rugged Full-Ring Triple Crimp
- Gray and Red Hose Color Tags Included
- 4-Layer Construction



Part #	Fitting Size	Quantity
HR1XR	1/4"	1



HR3C

Ball Valve / Low Loss Valve Charging Hose Set (5 ft / 1.5 m)

- Rugged Full-Ring Triple Crimp
- Hose Color Tags
- 4-Layer Construction
- Set includes (1) Ball Valve hose and (2) Low Loss Valve Hoses

Part #	Fitting Size	Quantity
HR3C	1/4"	3




RHCM45 | RHCM

5/16" to 1/4" Adapters

- Durable, Machined Brass with Valve Core



RHCM45



RHCM



VC2G

Dual Valve Core Removal Tool with Sight Glass

- Locks in the valve core on the first try
- Sight glass to verify captured valve core and see refrigerant flow
- Second ball valve to protect connected vacuum gauge
- Comfort spinner – a free-spinning, rubberized magnetic cap for easy removal and insertion against pressure
- Swappable service port fitting (1/4" standard, 5/16" optional)
- Vacuum-rated to 20 microns



VC1G

Valve Core Removal Tool with Sight Glass

- Locks in the valve core on the first try
- Sight glass to verify captured valve core and see refrigerant flow
- Comfort spinner – a free-spinning, rubberized magnetic cap for easy removal and insertion against pressure
- Swappable service port fitting (1/4" standard, 5/16" optional)
- Vacuum-rated to 20 microns



VC1

Compact Valve Core Removal Tool

- Locks in the valve core on the first try
- Compact size for tight space access
- Magnetic capture rod to keep the valve core on hand during service
- Swappable service port fitting (1/4" standard, 5/16" optional)
- Vacuum-rated to 20 microns



RVC4 | RVC5

Swappable Port Fittings

- Easily convert your VC2G, VC1G, or VC1 between 1/4" and 5/16"
- Includes 5 spare O-rings & storage tube
- 1/4" Replacement Fitting (RVC4)
- 5/16" Replacement Fitting (RVC5)




RVC4



RVC5



ELECTRICAL

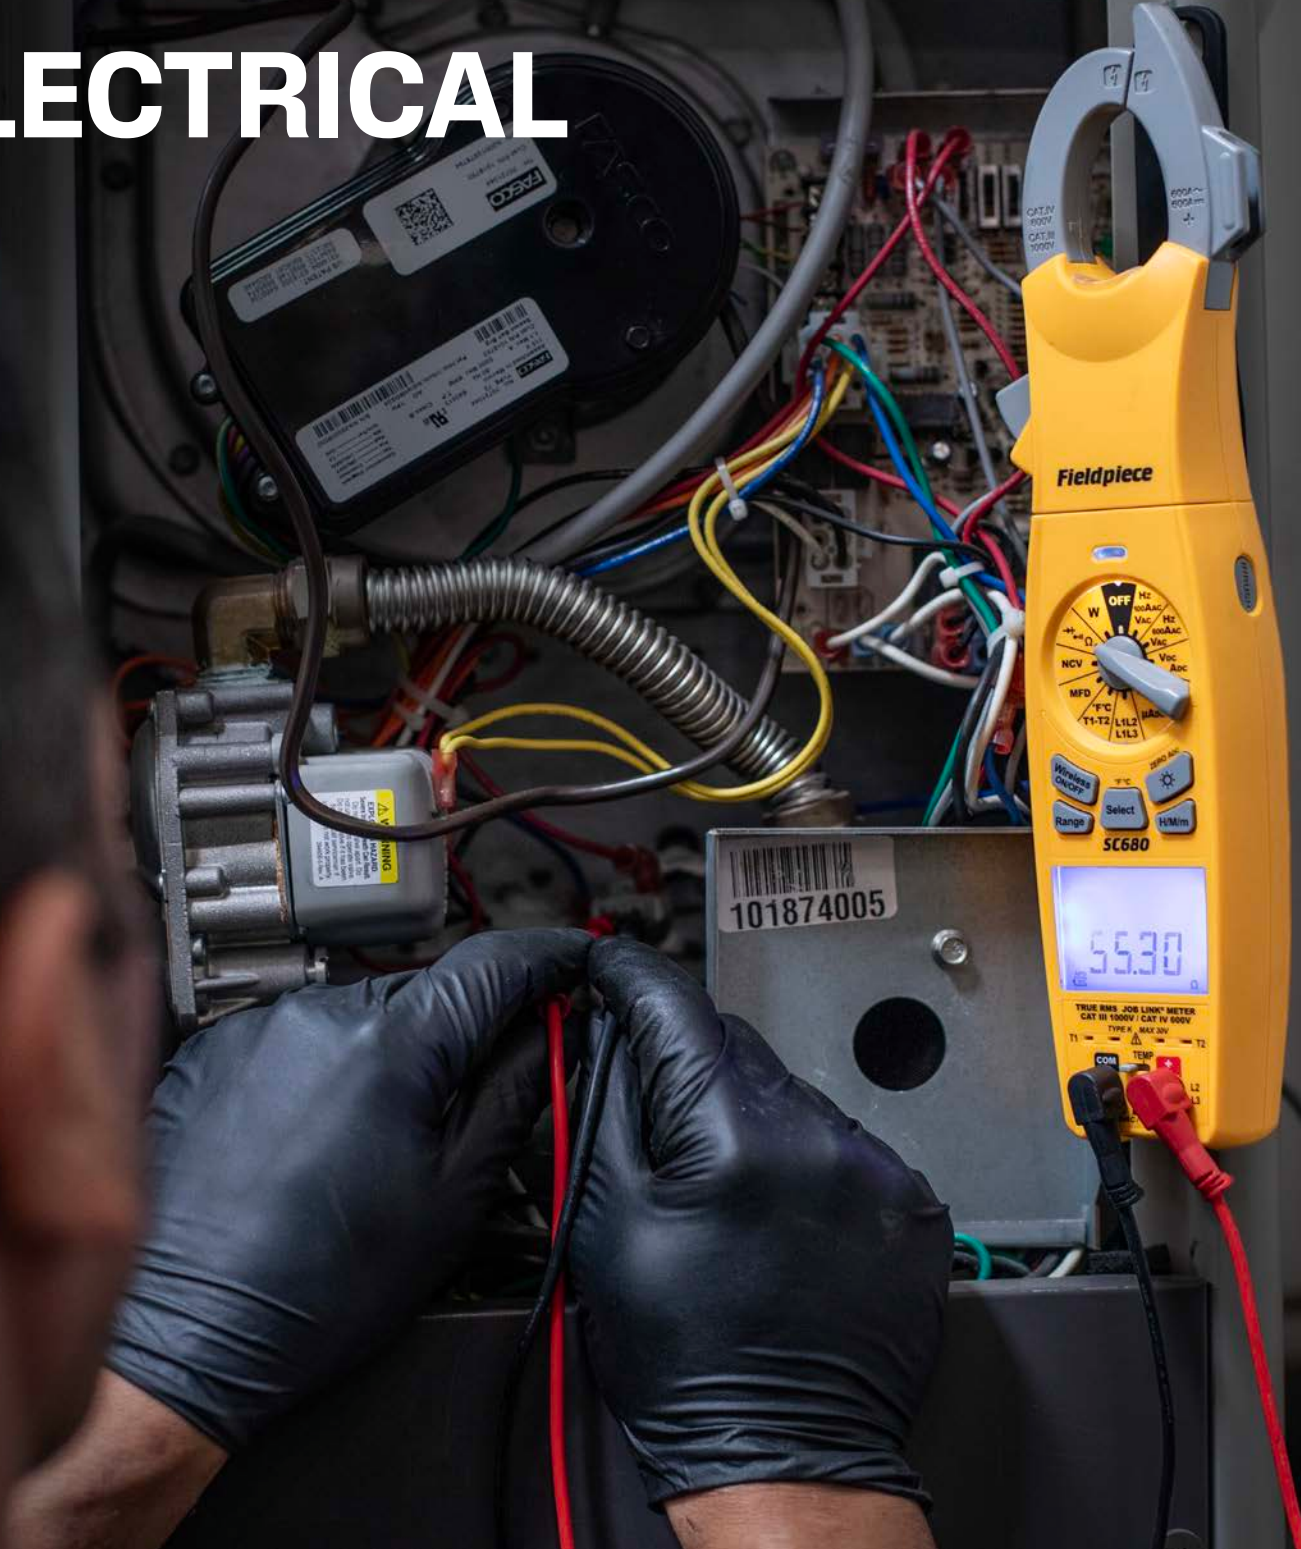



SC680

600A AC/DC Swivel Clamp Meter Dual Display - Power - LPF

- Wireless direct to Job Link® System for electrical documentation
- Measures Power (kW) for system efficiency
- Has True RMS and Low Pass Filter (LPF) to obtain accurate VFD readings
- DC Amps and Diode for mini-split inverters
- Dual temperature for delta T
- Molex test leads for small circuitry
- Test 3-phase with two leads
- Safety rated CAT IV – 600V/CAT III – 1,000V



JobLink

SC640

400A Swivel Clamp Meter Dual Display | Inrush

- Swivel-head with LED jaw flashlight
- Selector dial backlight
- Large backlit display
- Magnetic strap
- Lead storage



SC480

600A Clamp Meter
Dual Display | Power

- Wireless direct to Job Link® System for electrical documentation
- Measures Power (kW) for system efficiency
- Has True RMS and Low Pass Filter (LPF) to obtain accurate VFD readings
- Molex test leads for small circuitry
- Test 3-phase with two leads
- Safety rated CAT IV – 600V/CAT III – 1,000V



JobLink

SC440

400A Clamp Meter
Dual Display | Inrush

- Sturdy magnetic strap
- True RMS
- Inrush current
- Test-lead holder
- Magnetic Strap




SC260

400A Clamp Meter Compact

- True RMS
- Volts AC/DC
- Temperature
- Magnetic Hanger
- Bright backlight



Function	SC480	SC440	SC260
Volts AC/DC	●	●	●
Power Factor	●		
Low Pass Filter	●		
Job Link® System	●		
Phase Rotation	●		
True RMS	●	●	●
Inrush	●	●	
Duty Cycle %		●	
600VAC/DC	●	●	
750VAC,1000VDC	●		
400 AAC	●	●	●
600 AAC	●		
Magnetic Strap	●	●	●
Dual Display	●	●	
Temperature °F/ °C	●	●	●
Capacitance	●	●	●
Microamps DC	●	●	
Frequency via Leads/Clamp	●	●	
Non Contact Voltage	●	●	●
50 Mega Ohm with 0.1 Resolution	●	●	
Continuity	●	●	●
Diode Test	●	●	●
Data Hold	●	●	●
Clamp Probe Holder	●	●	
Clamp Jaw Light	●	●	
LCD Backlight	●	●	●
Low Battery Indicator	●	●	●
Battery: 9V, 100 hrs	●	●	
Battery: 9V, 150 hrs			●
Compliance with UL 3rd Edition	●	●	●
CATIII 600VAC/DC	●	●	
UL rated up to CATIII 1000VAC/DC and CATIV 600VAC/DC	●		

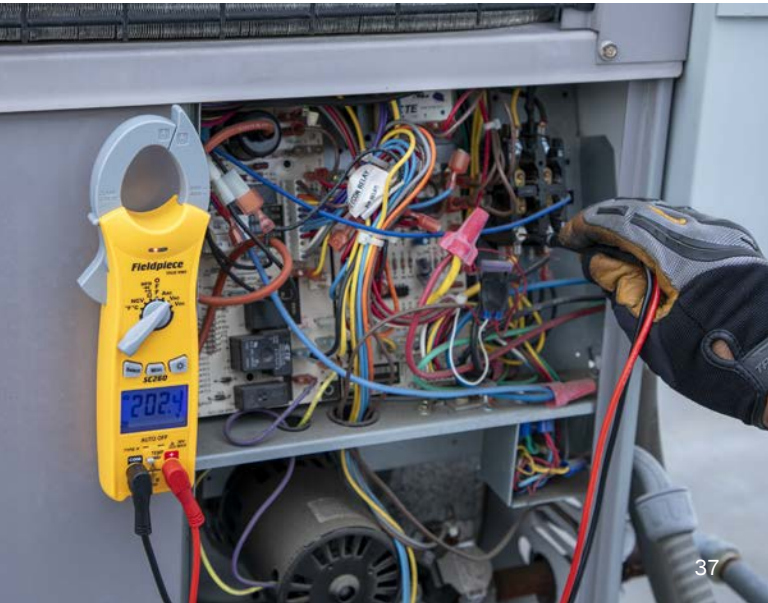

HS36

Stick Style Multimeter True RMS with Backlight

- Works with all accessory heads
- Non-contact voltage
- Microamps DC for flame diodes
- 400 AAC with included amp clamp
- Temperature up to 1,000 °F (538 °C)
- Lead storage



LT17A

Digital Multimeter

- Temperature up to 1,400 °F (760 °C)
- 400 AAC with included clamp
- Capacitance up to 200MFD
- Works with accessory heads
- Microamps for flame diode test
- Frequency for motor setup



HS33

Stick Style Multimeter Manual Ranging

- Works with any accessory head
- Non-contact voltage
- Microamps DC for flame diodes
- 400 AAC with included amp clamp
- Temperature up to 1,000 °F (538 °C)
- Convenient lead storage
- Safe one-handed testing



SNCV1

Non-Contact Voltage Tester

- Detects live AC voltage without contact
- Bright LED and loud beeper
- Range: 24VAC to 440VAC
- Senses 24VAC for thermostat power



ACH4

400A Amp Clamp Accessory Head

- Jaw claw helps isolate wires for testing
- Find run/start amps of motors and compressors
- Great partner for stick multimeters
- Angled jaw opens to 1.8 in (46 mm)



SMG5

Megohmmeter

- Helps predict compressor failure
- One handed testing
- Long probe tip for hard to reach terminals
- Bright backlight



AIR TOOLS



JL3KM2 | JL3MN

Job Link® System Dual Port Manometer Probe Kit

- 1,000 ft (300 m) Wireless range
- Precise placement with untethered design
- All-in-one static, gas and draft pressure
- Available as individual tool JL3MN



JobLink

SDMN6

Dual Port Manometer with Pressure Switch Tester

- Gas, static, and differential pressure
- Test pressure switches
- Easily calibrate any adjustable pressure switch
- Great for diagnosing furnace performance
- Built in continuity tester



SDMN5

Dual Port Manometer

- Measure duct pressures to balance air flow
- Resolution down to 0.01" WC for static pressure measurement
- -60.0" WC to 60.0" WC range
- Includes two 5/16" adapters for measuring inlet and outlet pressures





JL3RH

Job Link® System Flex Psychrometer Probe

- Powerful 1,000 ft (300 m) wireless range direct to Job Link® App on mobile device
- Communicates with Job Link® App and Wireless Manifolds (SM380V/SM480V)
- Strong magnetic hanger
- Supply and return side switch



JobLink



PRH2

Digital Pocket Psychrometer

- Wet bulb, dry bulb, dew point, %RH
- Quick walk-around measurements
- Easy in duct readings
- Helps calculate target superheat





SIG1

Gun Style IR Thermometer with Laser

- Accurate surface temperatures
- 10:1 field of view
- Select °F or °C
- Range: -22°F to 1022°F (-30°C to 550°C)



SPK2

In-duct Thermometer

- Quick and easy in-duct measurements
- Temperature range: -58°F to 392°F (-50°C to 200°C)
- Hanging hook
- Bright backlight



SPK1

Pocket Knife Style Thermometer

- Detent holds rod in 16 positions
- Temperature range: -58°F to 392°F (-50°C to 200°C)
- Stainless Steel
- Max/min/hold



SPK3

Thermometer – Compact Type K - Infrared

- Convenient 2-Way Temp | Rod/IR
- 8:1 IR
- Hands free in-duct temps
- Quick T1-T2 calculations
- Max/min/hold



ST4

Dual Temperature Meter Type K

- Two Type-K thermocouples included
- Accepts any Type-K thermocouple
- Resolution of 0.1 °F (0.06 °C)
- Separate MIN/MAX and HOLD buttons
- Easy field calibration



STA2

Anemometer Hot Wire

- In-duct air balancing with fast response time
- Minimizes turbulence effect
- Hands free testing
- 38 in (97 cm) telescoping probe in in-duct traversing
- Dual display shows combo of real-time CFM, air velocity, or temp



AAV3

Air Velocity and Temperature Accessory Head

- Measure velocity to calculate CFM
- Large vane covers most of register's free area
- Displays average measurement and real-time
- Works with Fieldpiece Stick Meters



HEATING



CAT85 | CAT85K2

Combustion Analyzer HC

- Accurately measure O_2 , CO, CO_2 , live draft pressure
- Built-in dual-port manometer
- SensorVault™ Technology
- HydroCycle™ Pump Technology
- Four-year sensor warranty
- Large 5.5 in (14 cm) touchscreen display
- Connect with Job Link® System App, industry-leading 1,000 ft (300 m) wireless range
- Can be sold as a kit with a printer (CAT85K2)



JobLink

CAT45 | CAT45K2

Combustion Analyzer

- Accurately measure O_2 , CO, CO_2 , draft pressure
- Four-year sensor warranty
- Large 5.5 in (14 cm) touchscreen display
- Field-replaceable sensors
- SensorVault™ Technology
- Connect with Job Link® System App, industry-leading 1,000 ft (300 m) wireless range
- Can be sold as a kit with a printer (CAT45K2)



JobLink

CATPR

Wireless Thermal Printer

- Compatible with Fieldpiece combustion analyzers
- Compact and portable
- Easy operation, drop-in paper loading
- Rechargeable lithium battery



DRX3

Refrigerant & Combustible Gas Leak Detector

- One sensor detects HC, HFC, CFC, HCFC, HFO, H2/N2 (Tracer Gas), blend refrigerants, and natural gas, propane, butane, methane heating fuels
- Field-replaceable heated diode sensor
- 60-hour life on replaceable batteries
- Sensitivity to 0.03 oz/yr (1g/yr)
- Large backlit easy-to-read LCD display
- Leak intensity feedback: flashing LED, beeps, LCD display, and Job Link® System app



JobLink  A3/A2L

SCM4

Carbon Monoxide Detector

- Field-replaceable CO sensor
- Calibrate to ambient quickly with the ZERO button
- Audio/visual alarms with mute
- Fast electro-chemical sensor
- Magnetic hanger for hands free



SOX3

Combustion Checker with Auto Pump

- Measures flue temp and %O2
- Calculates %CO2, %EA, and combustion efficiency
- Hands-free testing with magnet, R-cone, and automatic pump
- Programmable for custom fuel types





SDMN6

Dual Port Manometer with Pressure Switch Tester

- Gas, static, and differential pressure
- Test pressure switches
- Easily calibrate any adjustable pressure switch
- Great for diagnosing furnace performance
- Built in continuity tester



SDMN5

Dual Port Manometer

- Measure duct pressures to balance air flow
- Resolution down to 0.01 in WC (0.00036 PSI) for static pressure measurement
- Range is -60.0 in WC to 60.0 in WC (-2.17 PSI to 2.17 PSI)
- Includes two 5/16" adapters for measuring inlet and outlet pressures



ACCESSORIES



BG44

Service Tool Bag

- Rugged, elevated rack for hand tools
- Padded pockets to protect meters
- Magnetic tray
- Quick carry single strap
- Compact rugged design



BG36

Inspection Tool Bag

- Quick locking magnetic closure
- Isolated pockets for test instruments
- Weather protected sturdy base
- Compact rugged design



S365

Charging Jacket for TXV Systems

- Charge from 37-70°F (3-21 °C) outside temperatures
- Service maintenance contracts before and after summer heat
- Extend billable hours
- Easy to adjust to reach correct pressure differential
- Looks professional



PLM2

Lighted Mirror Tool

- Adjusts in any direction
- LED light
- Detach the mirror to use as flashlight



TC24

Pipe Clamp Thermocouple

- Works on pipes between 3/8 - 1 3/8 in (10–35 mm)
- Ideal for residential and light commercial cooling systems
- Accuracy: $\pm 1^{\circ}\text{F}$ (0.5°C) after field calibration (meets California's Title 24 specifications)



TC48

Large Pipe Clamp

- Jaw range between 3/4 – 4 1/8 in (19 – 105 mm)
- Extremely accurate and quick
- Patented Rapid Rail® Sensor
- Single-hand operation
- Compact design



ATC1R

Small Clamp Thermocouple

- Works on pipes between 1/8" to 3/4"
- Accuracy: $\pm 4^{\circ}\text{F}$ (2°C) ; $\pm 1^{\circ}\text{F}$ (0.5°C) after field calibration, 32 to 176°F (0 to 80°C)
- Temperature range: -50 to 257°F (-46 to 125°C)



Keep Learning with Fieldpiece University

HVACR Techs

- Training on specific applications and techniques.
- Extend your skills and knowledge about various industry topics.
- Video and interactive online training tools.
- Quizzes after the training to cement learnings.

Distributor Partners


- Training that's focused on helping you find the right product for customers and technicians.
- Resources to help you build your business through a more knowledgeable sales staff.
- Video and interactive online training tools.
- Quizzes after the training to ensure your sales team learned what they need.

Enroll Now!

First time BlueVolt learners



Current Bluevolt learners, scan below to add Fieldpiece University to your profile.



Technicians



Distributors

Note for Distributors: If you are part of a distributor organization or buying group that already uses its own online university on BlueVolt, then Fieldpiece sales training courses are already available to you there. Please check with your distributor organization or buying group to confirm.



Rewards Program

Earn Points. Get Swag.

Create Your Account

Head over to fpmerchstore.com to create your Fieldpiece Rewards account and get a free point just for signing up!

Earn Your Points

1. Complete education courses on Fieldpiece University.
(Your Fieldpiece University email must match your rewards account email to earn points.)
2. Register your Fieldpiece tools. (Your Fieldpiece support portal email must match your rewards account email to earn points.)
3. Attend Fieldpiece trainings and counter days.

Hit the Shop

Save up and spend your rewards points on Fieldpiece merch and apparel. New reward items will be added seasonally, so keep an eye out!


Get Started Today!



Merch
Shop



Fieldpiece
University



Tool
Registration

Distributor Rewards Program also available.
Contact your local Fieldpiece sales rep for details.



Index

Product		Pages
AAV3	Air Velocity and Temperature	48
ACH4	Current Clamp	38
ATC1R	T/C-Clamp (1/8 - 3/4")	62
BG36	Inspection Tool Bag	60
BG44	Service Tool Bag	60
CAT45	Combustion Analyzer	52
CAT85	Combustion Analyzer HC	52
CATPR	Wireless Thermal Printer	52
DR58	Heated Diode Refrigerant Leak Detector	24
DR82	Infrared Refrigerant Leak Detector	24
DRX3	Refrigerant and Combustible Gas Leak Detector	24 , 54
GS322F	GS322F (3-PORT: Common + A2L)	09
GS334F	GS334F (3-PORT: Refrigeration)	09
GS422F	GS422F (4-PORT: Common + A2L)	09
GS434F	GS434F (4-PORT: Refrigeration)	09
HOSES	Hoses and Fittings	28
HS33	Stick Meter	38
HS36	Stick Meter	38
JL3KH6	Job Link® System Charge and Air Kit	10
JL3KM2	Job Link® System Dual Port Manometer Probe Kit	42
JL3KR4	Job Link® System Charge Kit	11
JL3LC	Job Link® System Large Pipe Clamp	12
JL3MN	Job Link® System Single Port Manometer Probe	42
JL3PC	Job Link® System Premium Pipe Clamp Probe	12
JL3PR	Job Link® System Pressure Probe	12
JL3RH	Job Link® System Flex Psychrometer Probe	44
LT17A	Digital Multimeter	39
MG44	Wireless Vacuum Gauge	19
MR45	Recovery Machine	16
OIL128	Vacuum Pump Oil - 32oz	21
OIL32	Vacuum Pump Oil - 128oz	21
OIL8X3	3 Pack Vacuum Pump Oil	20
PLM2	Lighted Mirror Tool	61
PRH2	Digital Pocket Psychrometer	45
RHCM	5/16" to 1/4" Adapter	29

Product		Pages
RHCM45	5/16" to 1/4" Angled Adapter	29
RVC4	1/4" VCRT Replacement Fitting	31
RVC5	5/16" VCRT Replacement Fitting	31
S365	Charging Jacket	60
SC260	Compact Clamp Meter	36
SC440	Essential Clamp Meter	36
SC480	Wireless Power Clamp Meter	36
SC640	Loaded Clamp Meter	35
SC680	Wireless Power Clamp Meter	34
SCM4	Carbon Monoxide Detector	54
SDMN5	Dual Port Manometer	42 , 57
SDMN6	Dual Port Manometer and Pressure Switch Tester	42 , 56
SIG1	Gun Style IR Thermometer with Laser	46
SM382V	3 Port Digital Manifold	08
SM482V	4 Port Digital Manifold	08
SMG5	Megohmmeter	39
SNCV1	Non-contact Voltage Tester	39
SOX3	Combustion Check with Automatic Pump	54
SPK1	Compact In-Duct Thermometer	46
SPK2	In-Duct Thermometer	47
SPK3	Rod and IR Temperatures	47
SR47	Wireless Refrigerant Scale	16
SRS1	Wired Refrigerant Scale	16
ST4	Dual Temperature Thermometer	48
STA2	In Duct Hot-wire Anemometer	48
TC24	Pipe Clamp Thermocouple	62
TC48	Large Pipe Clamp Thermocouple	62
VC1	Compact Single Valve Core Removal Tool	30
VC1G	Single Valve VCRT with Sight Glass	30
VC2G	Dual Valve VCRT with Sight Glass	30
VP67	6 CFM Vacuum Pump	18
VP833	A3 8 CFM Vacuum Pump	18
VP87	8 CFM Vacuum Pump	18
VPX7	10 CFM Vacuum Pump	18



Fieldpiece®

1636 W Collins Ave
Orange, CA 92867 USA
+1 714 634 1844

2026.03.V01

© 2026 Fieldpiece Instruments, Inc. All rights reserved.

